


## THERMAL FILLER PAD

### WG-S Series

The thermal gap filler pad has good compressibility and conformability. It also exudes low silicone out gassing and surface grease contamination.

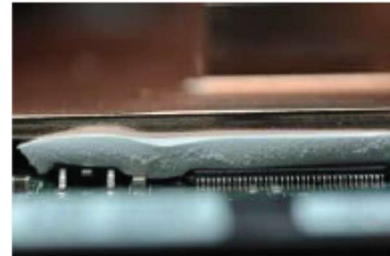

#### PRODUCT FEATURES

- Non-toxic base, good insulator
- Low grease releasing
- High heat distribution, good for gap filling

#### PRODUCT APPLICATION

- Cellphone, Tablet, Notebook, PCB, Chipset, LCD
- Router, Disk drive, GPS, Game Device
- Masking Device, Test Equipment, Military

Item	Unit	WG-75S	WG-110S	Test Method
Thermal Conductivity	W/m.k	7.5	11	ASTM D5470
Hardness	Shore 00	70	60	ASTM D2240
Thickness	mm	0.3~2.0	0.5~2.0	ASTM D374
Specific Gravity	g/cm <sup>3</sup>	3.2	3.1	ASTM D792
@ 1.0mm Volume Resistivity	Ωcm	10 <sup>10</sup>	10 <sup>10</sup>	GB/T 1410
Adhesive	-	-	-	-
Self adhesive	Double sided	Double sided	Double sided	-
Breakdown Voltage	kV / mm	>6	>6	ASTM D149
Flammability Class	UL	94 V-0	94 V-0	UL
Max Temperature Range	°C	-40~+200	-40~+200	-
Colour	-	Grey	Grey	Visual

#### AMEC Thermasol

1-2 Steam Mill Lane, Great Yarmouth, Norfolk, NR31 0HP

Telephone: +44(0) 1493 668622

Email: [sales@amecthermasol.co.uk](mailto:sales@amecthermasol.co.uk) Website: [www.amecthermasol.co.uk](http://www.amecthermasol.co.uk)